

GAS, AIR & THERMAL OIL ORIFICE METER SETS




Orifice meters measure the fluid flow based on the differential pressure principle. Their high durability, easy installation, proper prices, low maintenance costs and short delivery time bring them to forefront.



OM1 THREADED ORIFICE METERS

- **Dimensions:** 1/2" - 1 1/2"
- **Mounting Type:** Threaded Connection
- **Measuring Connection:** Test Nipple, Cutting Rings, etc.
- **Type of Fluid:** Natural Gas, Propane, LPG, Air

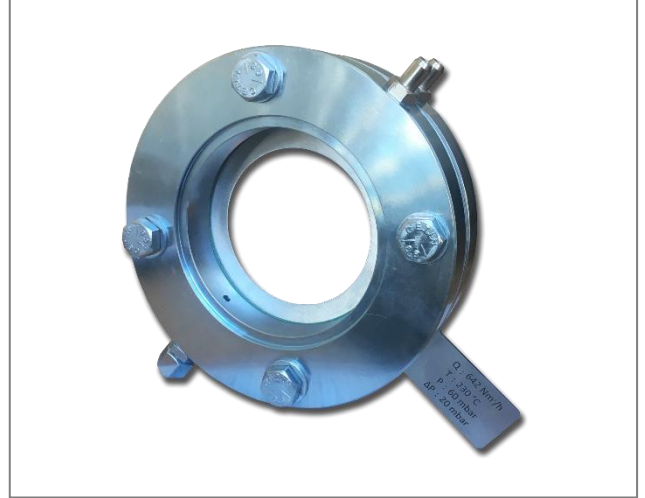

OM2 WELDED ORIFICE METERS

- **Dimensions:** DN 50 - DN 150
- **Mounting Type:** Welded Connection
- **Measuring Connection:** Test Nipple, Cutting Rings, etc.
- **Type of Fluid:** Natural Gas, Propane, LPG, Air



OM3 FLANGED ORIFICE METERS

- **Dimensions:** DN 40 - DN 350
- **Mounting Type:** Flanged Connection
- **Type of Fluid:** Natural Gas, Propane, LPG, Air, Thermal Oil
- **Flange Compatibility:** EN 1092-1 (PN), ASME B16.5 (ANSI)





OM5 FLANGED ORIFICE METERS

- **Dimensions:** DN 200 - DN 1000
- **Mounting Type:** Flanged Connection (D - D/2)
- **Type of Fluid:** Air
- **Flange Compatibility:** EN 1092-1 (PN), ASME B16.5 (ANSI)

WORLDWIDE SHIPMENT WITH SHORT DELIVERY TIMES

Orifice Meters are shipped Worldwide with proper prices and short delivery times. Please contact us via info@yetencombustion.com for your inquiries.

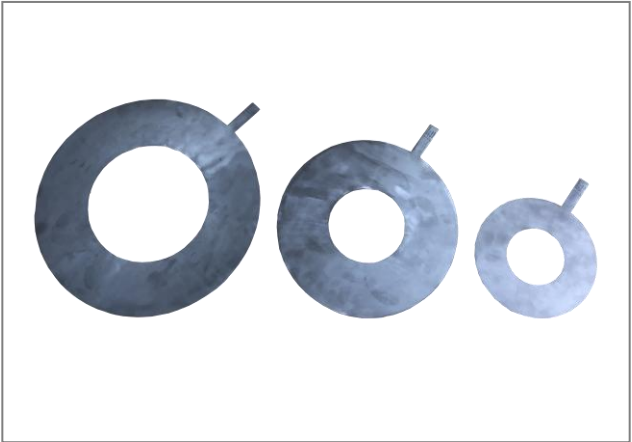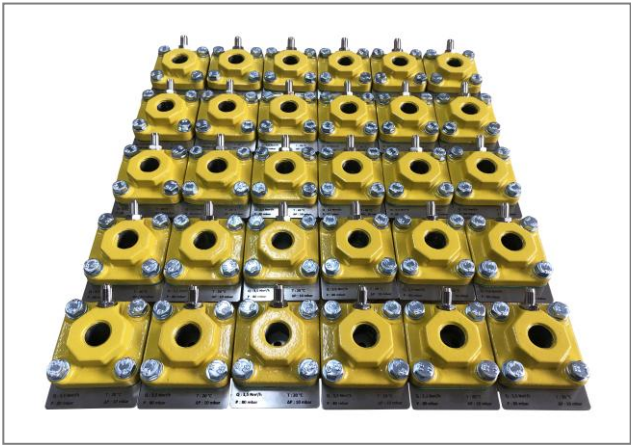

REQUIRED INFORMATION

Please inform us below information with your inquiries.

Type of Fluid	Natural Gas, Air, Thermal Oil, etc.
Altitude Above Sea Level	150 m
Flow Rate	700 Nm ³ /h
Temperature	20 °C
Pressure	70 mbar
Differential Pressure	10 mbar
Pipe Inner Diameter	Ø101,6 mm
Flange Pressure Class	PN 6 (Only for OM3 and OM5 Orifice Meters)

UNI SENSOR is a Trademark of YETEN Combustion & Energy Technologies Ltd. Co.

A. DES Sanayi Sitesi, 113. Sokak, No: 33, Umraniye, 34775, İstanbul - Turkey T. +90 216 420 22 18 M. info@yetencombustion.com W. www.yetencombustion.com